

# Cylindrical Lens Array

## Pitch 0.5



### Features and Advantages

Lens array with cylindrical lenses on one side.

Top hat profiles with high homogeneity can be generated in one dimension.

\* Product similar to image, see product drawing below.


### Product Specifications

Specification Data	Unit	Value
Material		Fused Silica
Length (L)	mm	12.0 ± 0.1
Width (W)	mm	12.0 ± 0.1
Thickness (T)	mm	2.0 ± 0.1
Clear Aperture	mm <sup>2</sup>	10.0 x 10.0
Refractive Index n @ 248 nm / @ 532 nm / @ 1064nm		1.509 / 1.461 / 1.449
Pitch (P)	mm	0.5
Transmission (without coating)	%	> 90
Protective Chamfer	mm x 45°	NA
Surface Imperfections (DIN ISO 10110-7)		5/ 2×0,1; L1×0,25; E1.0

Product Code	ZLA000233 <sup>(1)</sup>	ZLA000479	ZLA000239	ZLA000601 <sup>(1)</sup>	ZLA001110 <sup>(1)</sup>	ZLA001111 <sup>(1)</sup>		
<b>Specification Data</b>	<b>Unit</b>	<b>Value</b>						
Radius	mm	2.15 ± 0.06	3.50 ± 0.11	5.50 ± 0.17	14.0 ± 0.42	21.0 ± 0.63	31.3 ± 0.94	
EFL	@ 248 nm	mm	4.23 ± 0.13	6.88 ± 0.21	10.8 ± 0.32	27.5 ± 0.83	41.3 ± 1.2	61.6 ± 1.8
	@ 532 nm	mm	4.67 ± 0.14	7.60 ± 0.23	11.9 ± 0.36	30.4 ± 0.91	45.6 ± 1.4	67.9 ± 2.0
	@ 1064nm	mm	4.78 ± 0.14	7.78 ± 0.23	12.2 ± 0.37	31.1 ± 0.93	46.7 ± 1.4	69.6 ± 2.1
Numerical Aperture [p / (2f)]	@ 248 nm		0.0591	0.0363	0.0231	0.0091	0.0061	0.0041
	@ 532 nm		0.0535	0.0329	0.0210	0.0082	0.0055	0.0037
	@ 1064nm		0.0523	0.0321	0.0204	0.0080	0.0054	0.0036

<sup>(1)</sup> Example for customization – design and dimensions on request.

### Product Drawing (mm)

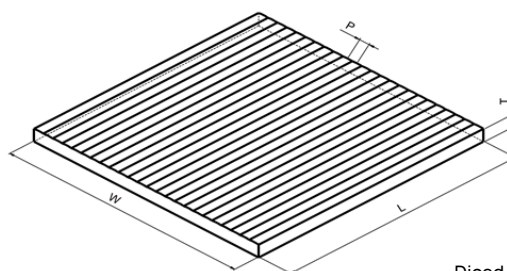

Diced asymmetrically – symmetric dicing on request

Rev 03 | Updated June 7, 2021 | RoHS compliant 2011/65/EU and 2015/863/EU

1

All rights reserved. Product specifications and descriptions are subject to change. All our products are patent pending. Please contact our sales representatives for complete details.

LIMO GmbH

Address: Bookenburgweg 4-8, 44319 Dortmund, Germany

Focuslight (Dongguan) Microoptics Co. Ltd.

Address: Room 301, Building 9, 38 Dongke Road, Dongcheng Street, Dongguan, Guangdong, P.R. China

Tel: +49 231 22 24 1-0 (DE) +86 29 8956 0050 (CN) | Email: sales@focuslight.com | Website: https://www.focuslight.com