


Conduction Cooled Vertical Stack Diode Laser

Vsilk 2 Pro-2000plus

| | | |
|--|--|--|
| | <p>Features</p> | <p>Applications</p> |
| | <ul style="list-style-type: none"> • High power 200W/bar • High beam quality • High reliability • Small size • Light weight | <ul style="list-style-type: none"> • Hair removal |

Product Dimensions (mm)

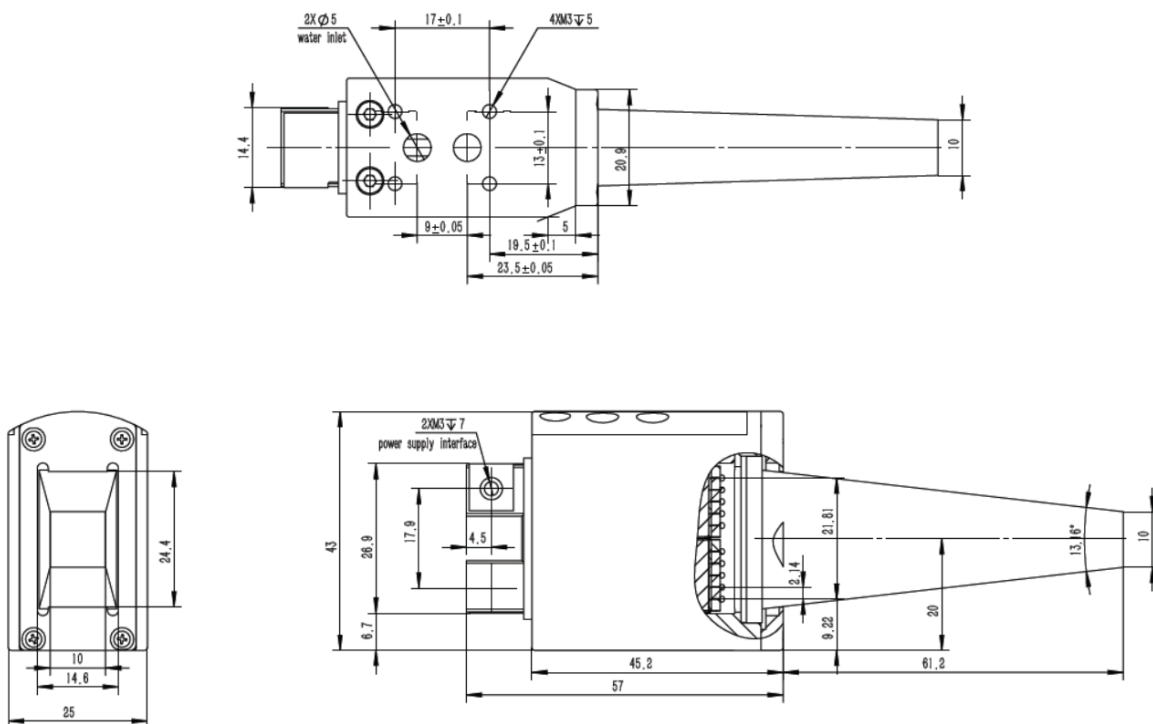

Remark: The structure drawing is for reference only. Please feel free to contact us for any special requirements.

Product Specifications

Product Code

Part No. ¹

FL-Vsilk2Pro-2000-808-P

| Optical Data ² | Unit | Value |
|---|-------|---------|
| Centroid Wavelength | nm | 808 |
| Wavelength Tolerance | nm | ± 15 |
| Output Power after LD ³ | W | 2000 |
| Output Power after waveguide ³ | W | 1700 |
| Number of bars | - | 10 |
| Spot Size ⁴ | mm | 10 × 10 |
| Wavelength Temp. Coefficient | nm/°C | ~ 0.28 |

| Electrical Data ² | | |
|------------------------------|-----|-------|
| Operation Current | A | ≤ 210 |
| Threshold Current | A | ≤ 30 |
| Operating Voltage | V | ≤ 20 |
| Slope Efficiency per bar | W/A | ≥ 1.0 |
| Power Conversion Efficiency | % | ≥ 48 |
| Max. Pulse Width | ms | 100 |
| Max. Duty Cycle | % | 10 |

| Miscellaneous Data | | |
|------------------------------------|-------|-------------------------------|
| Operating Temperature ⁵ | °C | 22 ~ 28 |
| Coolant | - | Distilled water or pure water |
| Flow Rate | L/min | 3 ~ 4 |

¹ Part No. = Brand Code - Series - Power - Centroid Wavelength .

² Data at 25°C unless otherwise stated.

³ Reduced lifetime if used above nominal operating conditions.

⁴ Output from the waveguide.

⁵ A non-condensing environment is required for storage and operation below ambient dew level.



Recommended Operation Condition

| Vsilk 2 Pro-2000plus Energy Table | | | | | | | | | | | | | | | |
|-----------------------------------|-----|---------------|----|----|----|----|----|----|----|----|----|----|-----|-------|--|
| Energy(J) | | Frequency(Hz) | | | | | | | | | | | Iop | | |
| | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 20 | | ~200A | |
| Pulse width (ms) | 5 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | | ~150A |
| | 10 | 17 | 17 | 17 | 17 | 17 | 17 | 17 | 17 | 17 | 17 | | | | ~120A |
| | 20 | 26 | 26 | 26 | 26 | 26 | | | | | | | | | ~90A |
| | 30 | 29 | 29 | 29 | | | | | | | | | | | Water Temperature: T=25±3°C Flow Rate: 3~4L/min |
| | 40 | 38 | 38 | | | | | | | | | | | | |
| | 50 | 48 | | | | | | | | | | | | | |
| | 100 | 63 | | | | | | | | | | | | | |